


# Current Transformer

## CT 71 – Window

IEC 60044-1

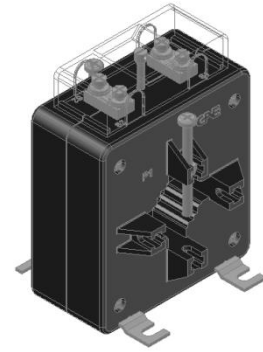


### Specification

Highest voltage for equipment Um (r.m.s.)	0.72 kV
Rated power-frequency withstand voltage (r.m.s.)	3 kV
Rated short-time thermal current (I <sub>th</sub> )	60 I <sub>pn</sub>
Rated dynamic current (I <sub>dyn</sub> )	2.5 I <sub>th</sub>
FS	5
Class of Insulation	E
Rated frequency	50 ... 60 Hz
Working temperature	0° ... 50° C
Storage temperature	-10° C ... +70° C
Relative humidity	95% (non condensing)
Cable diameter	≤ 30 mm
Bus Bar Size (h x w) mm	5x10 ... 10x40
Case / Color	PC V0 / Black
Weight	850 gr

### Sales Package :

- Terminal cover : 1 pcs
- Cover seal screw : 1 pc
- Fastening screw (M5x40) + Nut M5 : 2 pcs
- Mounting clad : 4 pcs
- QC sheet : 1 pcs

### Dimension (mm)

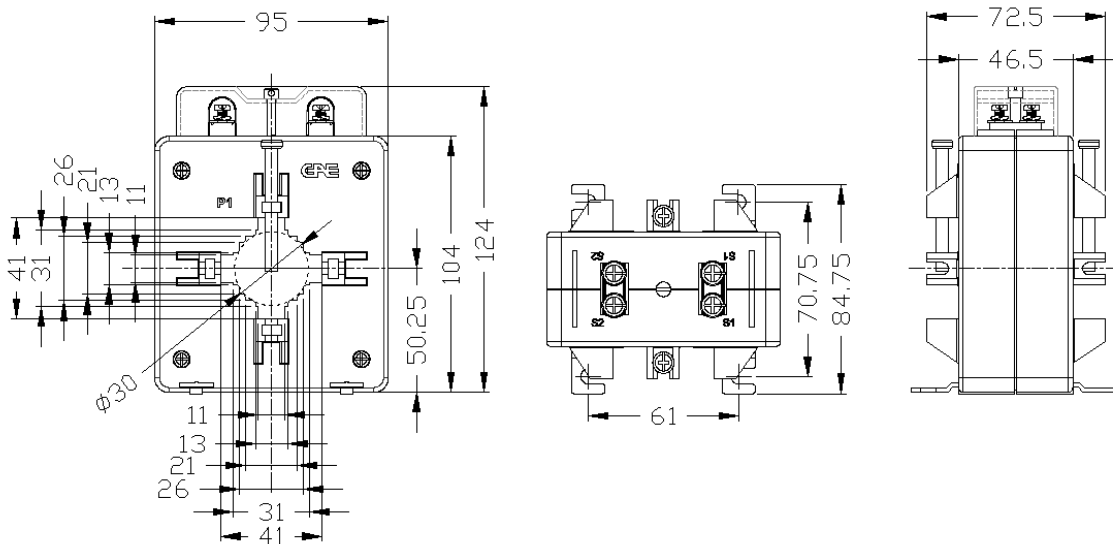

## Ordering Code

Rated Current I <sub>p</sub> n/I <sub>s</sub> n	Class 1		Class 0.5		Class 0.5S	
	Rated Output (VA)	Ordering Code	Rated Output (VA)	Ordering Code	Rated Output (VA)	Ordering Code
60/5A	2.5	20600	-	-	-	-
75/5A	3.75	20603	2.5	20602	2.5	20601
80/5A	3.75	20606	3.75	20605	3.75	20604
100/5A	5	20609	5	20608	5	20607
120/5A	5	2060D	5	2060C	5	2060B
125/5A	5	2060H	5	2060G	5	2060F
150/5A	5	2060N	5	2060M	5	2060L
200/5A	5	2060T	5	2060S	5	2060R
250/5A	5	2060Z	5	2060Y	5	2060X
300/5A	5	20615	5	20614	5	20613

Rated Current I <sub>p</sub> n/I <sub>s</sub> n	Class 0.2		Class 0.2S		Class 0.1	
	Rated Output (VA)	Ordering Code	Rated Output (VA)	Ordering Code	Rated Output (VA)	Ordering Code
60/5A	-	-	-	-	-	-
75/5A	-	-	-	-	-	-
80/5A	-	-	-	-	-	-
100/5A	-	-	-	-	-	-
120/5A	2.5	2060A	-	-	-	-
125/5A	3.75	2060E	-	-	-	-
150/5A	5	2060K	5	2060J	2.5	2060I
200/5A	5	2060Q	5	2060P	5	20600
250/5A	5	2060W	5	2060V	5	2060U
300/5A	5	20612	5	20611	5	20610