

Press Connector


IEC 61238-1



Specification

Material	Copper
Finishing	Nickel Plated
Composition of Copper	≥ 99,92%
Electrical Conductivity	≥ 98%
Tensile Strength	≥ 250N
Class	A

Dimension (mm)

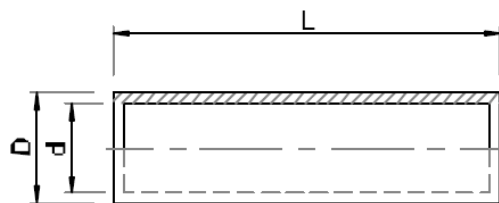

Ordering Code

Cable Size (sqmm)	Dimension (mm)			Box Contain (Pcs)	Weight per-box (Kg)	Ordering Code
	d	D	L			
2.5	2.3	4.2	25	100	0.22	80505
4	3	5	25	100	0.27	80506
6	4	6	25	100	0.35	80503
10	4.5	7	30	100	0.60	80504
16	5.5	8.5	35	100	1.06	8050D
25	7	10	40	100	1.46	80507
35	8.5	12	45	100	2.32	80500
50	10	14	50	100	3.45	80508
70	11.5	16	55	50	2.52	80509
95	13.5	18	60	50	2.99	8050E
120	15	19.5	65	40	2.92	8050A
150	16.5	21	70	30	2.56	8050B
185	19.5	24	75	20	2.12	8050F
240	21	26	85	18	2.64	8050C
300	23.5	29.5	100	10	2.29	8050G
400	27	34	110	10	3.32	80501
500	31	42	120	10	4.40	80502