


Current Transformer

CT 60 – Window

IEC 60044-1

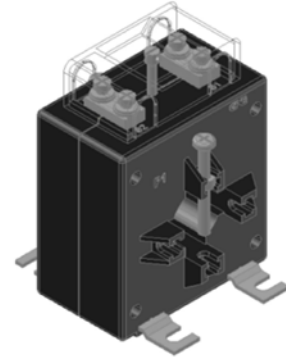


Specification

Highest voltage for equipment Um (r.m.s.)	0.72 kV
Rated power-frequency withstand voltage (r.m.s.)	3 kV
Rated short-time thermal current (I _{th})	60 I _{pn}
Rated dynamic current (I _{dyn})	2.5 I _{th}
FS	5
Class of Insulation	E
Rated frequency	50 ... 60 Hz
Working temperature	0° ... 50° C
Storage temperature	-10° C ... +70° C
Relative humidity	95% (non condensing)
Cable diameter	≤ 25 mm
Bus Bar Size (h x w) mm	5x10 ... 10x30
Case / Color	PC V0 / Black
Weight	600 gr

Sales Package :

- Terminal cover : 1 pcs
- Cover seal screw : 1 pc
- Fastening screw (M5x40) + Nut M5 : 2 pcs
- Mounting clad : 4 pcs
- QC sheet : 1 pcs

Dimension (mm)

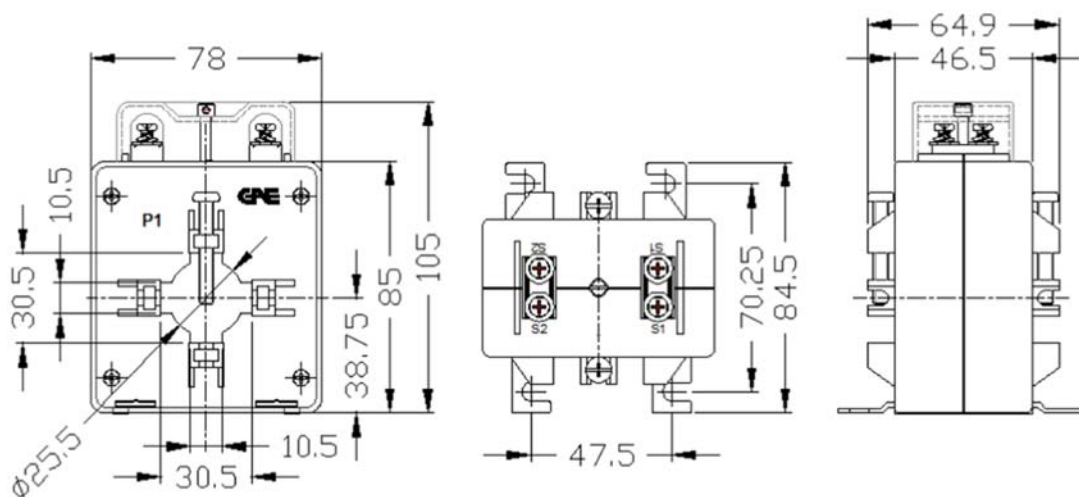

Ordering Code

Rated Current I _{pn} /I _{sn}	Class 1		Class 0.5	
	Rated Output (VA)	Ordering Code	Rated Output (VA)	Ordering Code
50/5A	1.25 (*)	2040T	-	-
60/5A	1.5 (*)	2040V	1.5 (*)	2040U
75/5A	2.5 (*)	2040X	2.5 (*)	2040W
80/5A	2.5 (*)	2040Z	2.5 (*)	2040Y
100/5A	2.5	20402	2.5	20401
120/5A	2.5	20405	2.5	20404
125/5A	2.5	20408	2.5	20407
150/5A	5	2040C	5	2040B
200/5A	10	2040G	5	2040F
250/5A	15	2040K	10	2040J
300/5A	20	2040O	15	2040N
400/5A	30	2040S	20	2040R

Rated Current I _{pn} /I _{sn}	Class 0.5S		Class 0.2	
	Rated Output (VA)	Ordering Code	Rated Output (VA)	Ordering Code
100/5A	2.5	20400	-	-
120/5A	2.5	20403	-	-
125/5A	2.5	20406	-	-
150/5A	5	2040A	2.5	20409
200/5A	5	2040E	2.5	2040D
250/5A	10	2040I	2.5	2040H
300/5A	15	2040M	2.5	2040L
400/5A	20	2040Q	5	2040P

Remark (*) : for indication use only (non IEC 60044-1)