


Set screw

- With the best tightening condition, the head of the set screw is shared off. Differences in the method of tightening are eliminated, secure tightening is not forgotten, and secure connections can be made.
- Zinc electroplated

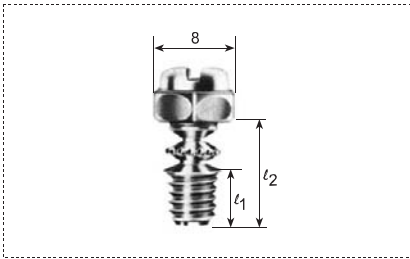

Cat. No.	length (mm)	l_1	l_2	Weight (kg)
DS0015	5	10.2	5	0.002
DS0016	6	11.2	6	0.002
DS0017	7.4	12.0	7.4	0.003


Set screw length and applicable products

Cat. No.	Length	Applicable Product
DS0015	5mm	Coupling E19, E31, ground connector E19, E31 Bushing (for conduit end) E19, E25 Circular surface box E19, E31. surface switch box E19 Entrance cap, universal E19
DS0016	6mm	Coupling E25, E39-E75, ground connector E25, E39-E75 Bushing (for conduit end) E39-E75 Circular surface box E25. surface switch box E25 Entrance cap, universal E25
DS0017	7.4mm	Normal Bend E25-E75 All product type of cast iron fittings

Labor saving tools

Hi-hickey

- It is suitable for JISE19, E25, E31 and E39.
Strong aluminium alloy.

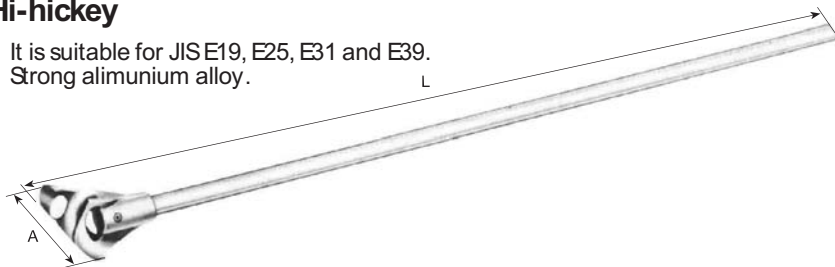


Cat. No.	Size	L	A	Weight (kg)
DS0029	E19	1115	100	1.6
DS0030	E25	1122	119	2.5
DS0031	E31	1274	160	3.7
DS0032	E39	1490	190	4.5

- Digunakan untuk meluruskan atau mengatur bengkokan/lengkungan Conduit E19-

Hi-bender

- JISE19 and E25 conduit can be bent without deformation.
Aluminium Alloy.

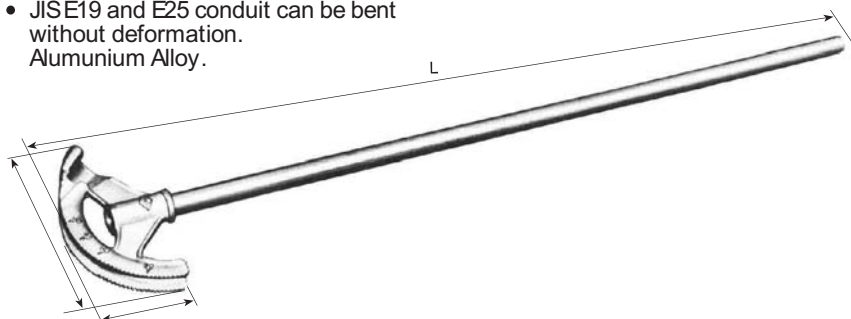


Cat. No.	Size	L	A	B	Weight (kg)
DS0019	E19	1,245	220	124	2.0
DS0025	E25	1,270	290	165	3.0

- Digunakan untuk membengkokkan Conduit E19 dan E25 hingga mencapai radius 90 .

Box screwdriver (with reamer)

- Used for champering the inner surface of conduit (19,25).

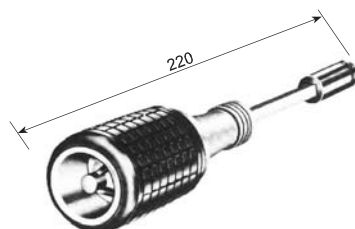

Cat. No.	Weight (kg)
DS0010	0.22

- Digunakan untuk menghaluskan permukaan luar dan dalam ujung Conduit yang dipotong.