

Kelman DGA 900 PLUS



9 gas on-line DGA expandable with add-ons to a Transformer Monitoring System (TMS)

Knowledge of the condition of transformers is essential for all electrical networks and on-line monitoring of transformers is an increasingly vital component of successful asset management programs. The comprehensive information provided by the Kelman™ DGA 900 PLUS not only allows expensive failures to be avoided but enables asset capabilities to be maximized.

The Kelman DGA 900 PLUS builds on the standard 9 gas DGA and moisture capabilities of the DGA 900 by enabling the addition of extra sensors, electronic cards and firmware algorithms to expand its monitoring capabilities. Bushing monitoring, partial discharge detection, OLTC monitoring, transformer models are amongst the options available to offer an integrated system which delivers a more in-depth picture of the transformer's overall condition and will monitor the root causes of most transformer failures.

Key Benefits

- Modular and retrofittable architecture using selectable standard add-on cards
- Provides extensive remote insight into transformer condition and safe operation
- Enables correlation of data for validation and in-depth fault analysis
- Graphical presentation using built-in web-page based HMI and local color screen
- Full integration with GE's acclaimed Perception™ Fleet asset management software
- From the only vendor with 15 years PAS experience and installed base of >15,000 units


Applications

While on-line DGA is now widely accepted as the most effective method of assessing the condition of a transformer, it does not cover all the possible sources of issues. Sub-systems like the tap changer, the cooling system or the bushings can generate their own problems if they are left unmonitored.

The DGA 900 PLUS monitoring system integrates DGA measurement, additional sensors, analysis models and data handling features to address the majority of prevalent failure modes. This cost-effective package provides the condition assessment tools essential for the effective management and optimal utilization of this critical sub-station asset.

It is most suited for monitoring large, mission critical transformers or compromised transformers with a view to extending their life and preventing any unexpected failure:

- GSU (Generation)
- HVDC station transformers
- Process critical Industrial transformer
- Transmission transformers



Cutting Edge DGA

- Laboratory challenging field measurement of nine gases plus moisture
- 4th generation of GE's PAS technology delivering improved measurement accuracy with lower detection limits
- No carrier or calibration gas consumables
- Complete analysis up to once per hour and new "Rapid Mode" for critical gases in ~30 min

Bushing Monitoring

- Measures the change in Capacitance C1 and/or Power Factor (Tan delta) caused by the deterioration of the bushing
- Avoid widespread collateral damage and even total loss of transformer

Partial Discharge

- Detects electrical PD events inside the transformer using the same bushing adaptors
- Multiple noise rejection methods and graphical PRPD analysis

OLTC Monitoring

- Supervision of a key mechanical component of the transformer
- OLTC tap position recorder
- Temperature difference between tanks
- Torque used by tap changing motor

Transformer Models

- Winding hot spot and insulation aging
- Cooling status and efficiency
- Bubbling temperature and dynamic loading
- Provides a more in-depth picture of the transformer's insulation system




1 DGA 900 base:

Online DGA (Dissolved Gas Analysis) and moisture measurement

Dissolved Gas Analysis (DGA) and moisture measurements of insulating fluids are recognized as the most important tests for condition assessment of transformers. In previous years, multi-gas DGA was traditionally confined to a laboratory environment, with infrequent yearly off-line manual sampling aiding time-based maintenance strategies.

However, as the global average age of transformers continued to rise, the possibility of rapid aging and even catastrophic failure between off-line tests also increased, leading many asset owners to adopt on-line DGA monitoring to provide remote alert and multi-gas diagnostic of deteriorating transformer condition.

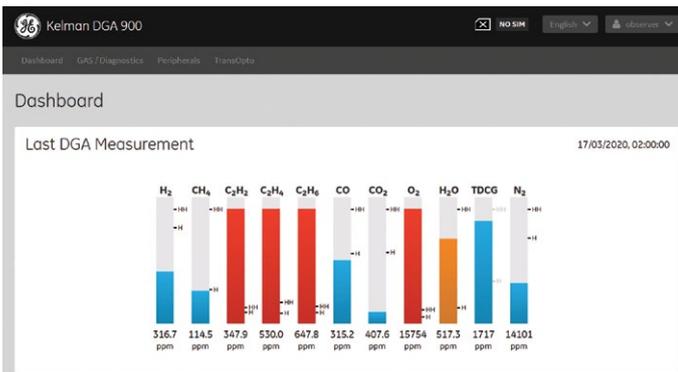


This facilitated operational decisions without needing to go to site for manual oil sampling. It avoided unplanned outages, increased network reliability and enabled the move to condition-based maintenance.

In the early 2000's, GE's original Kelman™ range of on-line multi-gas DGA analyzers brought Photo-Acoustic Spectroscopy (PAS) measurement technology to the market. GE is now proud to introduce the Kelman DGA 900, its next-generation multi-gas on-line DGA and moisture analyzer.

At its heart lies an evolved implementation of GE's proven PAS technology, providing laboratory challenging levels of precision and repeatability with

no consumables (carrier or calibration gases) and no need for frequent re-calibration. It also has enhanced computing power and scalable I/Os for future proofing and adding functionalities to grow each analyzer into a flexible transformer monitoring solution.

Transformer issues can now be detected in their infancy, making sure that they are fixed early so that the nominal expected life of the transformer can be achieved. Maintenance interventions can now be planned, reducing their length and their cost and causing less disruption to the network and customers. In addition, aging asset replacement strategies can be anchored on hard health condition data and not purely based on the age of the transformer.

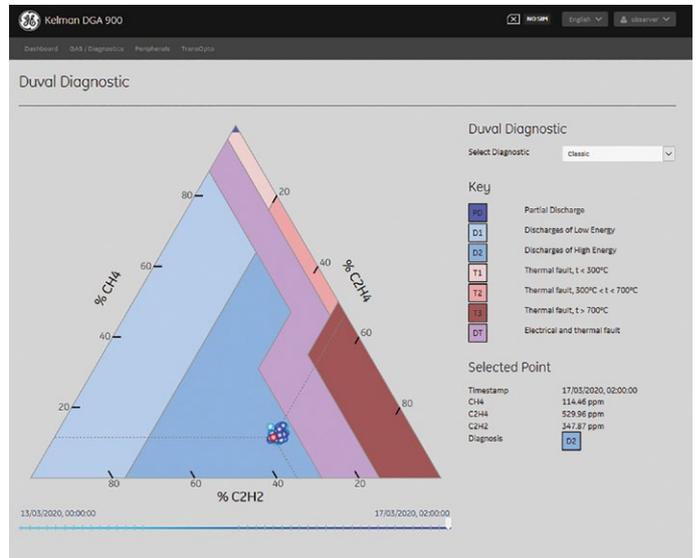

Benefiting from over 15 years of multigas DGA vendor experience and over 15,000 devices in the field, the DGA 900 encapsulates learnings and improvements derived from its predecessors to bring improved performance, innovative new features, enhanced user experience and increased field reliability and robustness.

2 Add-on: Bushings Monitoring

Bushing failures account for a large proportion of substation events that result in severe and costly damages and unfortunately even sometimes fatalities. Preventive maintenance, early bushing replacement and regular off-line testing have been employed to address this issue in the past.

Monitoring transformer bushings is critical because bushings are constantly under high stress due to the line voltage and heat effect of the current flow. These stresses can be further aggravated by the presence of micro cracks from manufacturing, loss of mechanical strength due to aging, repeated thermal cycling (load + sun), pollution and external flashover eroding the porcelain, sludge and moisture in the insulating oil, and by the fact that new bushings have been made closer to design limits in order to reduce cost, size and weight.

The Kelman DGA 900 PLUS with bushing monitoring is an integrated on-line system that continuously monitors the condition of up to 6 bushings (3x HV and 3x LV) and up to 12 bushings with 2 add-on cards. It uses custom bushing adapters (specifically designed for each bushing type).

It continuously measures the change in Capacitance C1 compared to the original nameplate value. It also measures the relative Power Factor (Tan Delta) change compared to the original nameplate value. If a reference voltage information is available, then the real PF induced by the bushing can be calculated and displayed. This provides information similar to that obtained during off-line tests.



“~30 Minute DGA”


When acetylene gas levels are rising and a risk of explosion exists, decisions need to be made quickly as a transformer shut-down can cause system wide disruption. The DGA 900 has a unique “~30-minute” mode that provides acetylene gas readings in half the time of a full cycle. Instead of waiting 3 hours to have 3 points on a graph, you get 3 points in 1.5 hours. Decisions can be made in half the time or with double the data for greater confidence.

“No gas consumables”

Some DGA technologies require both carrier and calibration gases. When the gas runs out, the system stops working. The more units, the more gas bottles, costs, logistics and supply chain to manage. Reducing measurement intervals to save gas increases the risk of missing fault. The DGA 900 never runs out of gases and is always available to monitor the asset.

“Custom made bushing adapters”

The design of the tapping point bushing adapters is crucial, not only must it make electrical connection but always ensure a reliable earthing connection. The design must prevent moisture ingress and bushing oil seal leaks. The connection must also not be affected by transformer vibrations. This is why we custom design each adapter to suit the individual bushing.

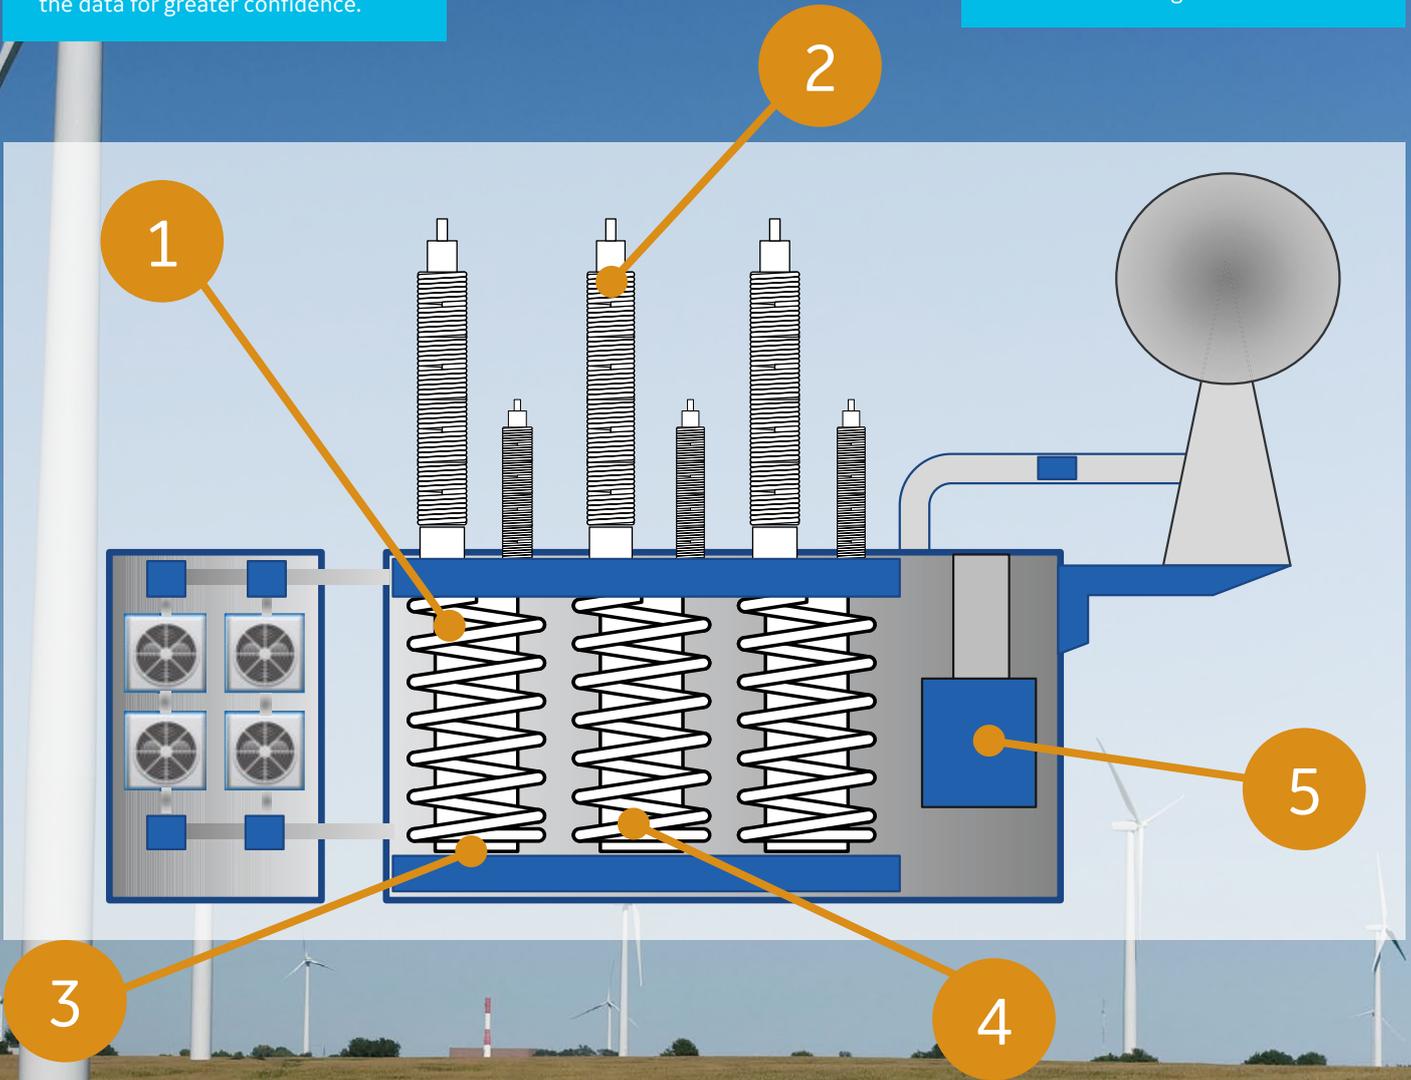

“Cooling efficiency monitoring”

It is usually during the worst conditions (load and/or temperature) when problems associated with the cooling fans are noticed, leading to an overheating transformer. Regularly monitoring cooling capacity and efficiency helps identify these problems early.

“Ester oil compatibility”

With Ester based insulating fluids sometimes being used instead of mineral oil for their better flashpoint properties or better environmental credentials, the DGA 900 is ready and compatible with both natural and synthetic ester fluids with a change of settings.

“OLTC motor torque”

By monitoring the current used by the OLTC motor when changing position, we can detect changes in the inrush current and get an idea of the increase in torque required to switch position. Much more accurate than relying on the number of changes to that position to detect potential coking of the contacts.

3 Add-on:

Electrical Partial Discharge Detection

Using the same bushing adapters used for bushing monitoring, the DGA 900 PLUS can also detect developing electrical Partial Discharge (PD) activity in the transformer's main tank. The count of PD events, amplitude (in pC) and overall level of PD energy (in mW) is measured so it can be trended.


Both polar plots and an HF CT on the neutral bushing can be used to verify that it is real PD (and not external interference). A PRPD (Phased Resolved Partial Discharge) representation is drawn and it can further be used to discriminate and to recognize any pattern in the PD.

All these measurements will alert personnel of fault conditions at an early stage and provide vital health information on the bushings and the transformer, allowing transformer asset owners to detect impending failures and reduce their maintenance costs.

4 Add-on:

Transformer Insulating System Models

The integrated Kelman DGA 900 PLUS comes with optional Input/Output (I/O) cards so that additional sensors can be attached to increase its measurement scope.

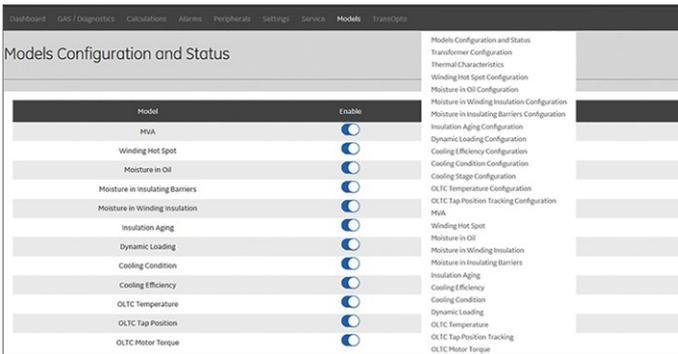

With this add-on, the DGA 900 can continuously measure other critical parameters such as oil temperatures, load current, water content in oil, and cooling status which are complementary to the DGA information.

It further incorporates on-board calculations based on the very latest IEC®/IEEE® thermal and moisture models standards and computed from the specific transformer characteristics obtained from the name-plate and test reports of the transformer.



These models convert raw data into additional intelligent information to monitor the state of the transformer's insulating system every 10 minutes and determine its long term aging profile.

This information can also assist system operators in making critical operational decisions, particularly when it comes to safely overloading aging transformers by calculating the dynamic loading capacity.

The aim of all the models is to aid in optimizing the transformer's life (which is dictated by the state of its insulating system) and in deriving the optimum operating profile to maximize operational effectiveness.


5 Add-on:

On-Line Tap Changer (OLTC) monitoring

On-Line Tap Changers (OLTCs) are complex mechanical devices with moving parts that wear over time due to the current they switch (contact wear) and the number of switches they perform (mechanical wear). An OLTC can operate many times a day, switching thousands of amps on each switch and sometimes over-using a limited set of contacts. This repeated use means that OLTCs require careful attention through inspection, replacement and refurbishment.

By monitoring the current position, the number of switching operations by position and the cumulated switched current load by position, an estimation of the contact wear can be obtained. In addition, the current consumption of the OLTC drive motor can be used to detect an increased difficulty in switching positions. Finally, coking of the contacts will lead to increased arcing, to an elevated oil temperature in the OLTC compartment and thus can be detected by an oil temperature delta to the main tank.

By monitoring these additional parameters, Condition Based Maintenance can be used on this key electro-mechanical component and an OLTC failure can be avoided, along with its usually not insignificant ensuing disruptions.

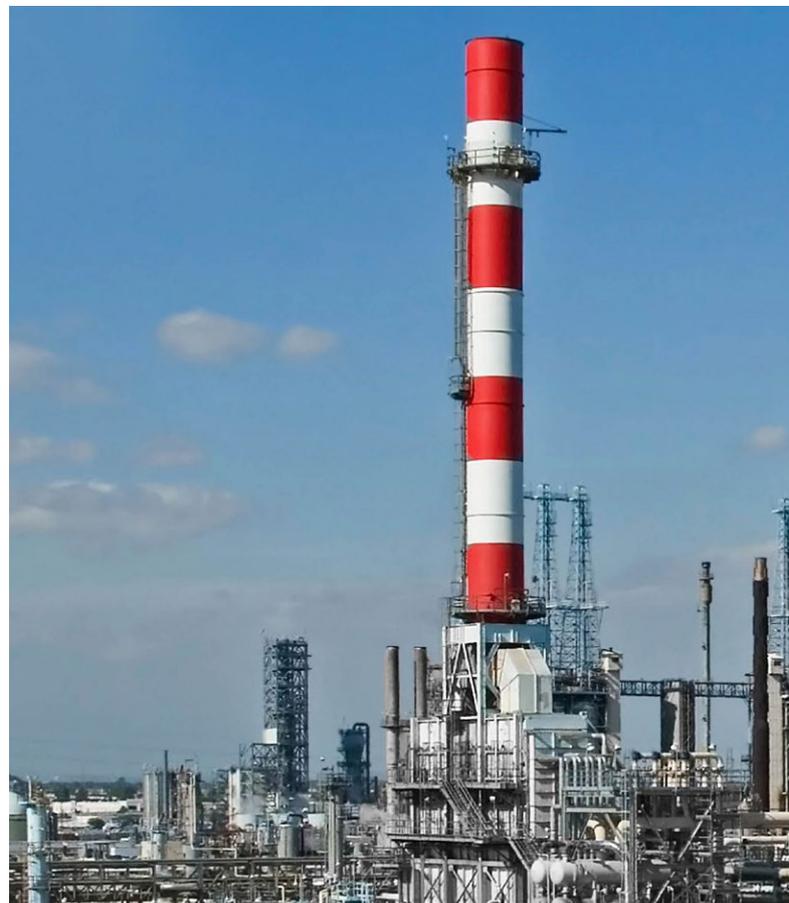

6

Add-on:

Perception Fleet Software

Easy to install and configure, GE's Perception™ Fleet Asset Management Software is the ideal companion to your GE on-line monitors for both transformers and circuit breakers.

Perception Fleet moves customers from a manual, one-on-one asset assessment process to an automated and continuous fleet management solution.



Primarily, Perception Fleet automatically downloads data from each GE online monitor and populates its database. It provides asset experts with comprehensive transformer diagnostic tools and data trending capabilities in order for them to dissect data and decide on the best course of action.

Perception also automatically analyses the data received, evaluates the condition of the asset and establishes the risk of failure of that asset (the Risk Index). Transformer risk evaluation algorithms are based on globally recognized standards (IEC, IEEE, ASTM, ISO & DIN) as well as CIGRÉ and EPRI best practices.


Perception features customizable overview reports and comprehensive alarm notification via email to ensure that the right person receives

critical information should an asset condition change.

It also offers a highly customizable data import and export facility to enhance interoperability with data historians and other Asset Life-cycle Management (ALM) packages.

“Asset comparison and ranking”

By comparing the various asset Risk Indexes, Perception Fleet is able to rank assets within a fleet and focus attention on the higher-risk assets as well as those that have just changed risk index. This not only reduces the data analysis burden on experts (expertise that is rapidly being lost) but also provides a clear strategic view of the fleet and a data-driven, easily defensible, asset replacement strategy. It also tracks the “overall fleet risk index” over time to show if the asset replacement and maintenance strategy is having the desired network reliability effect.

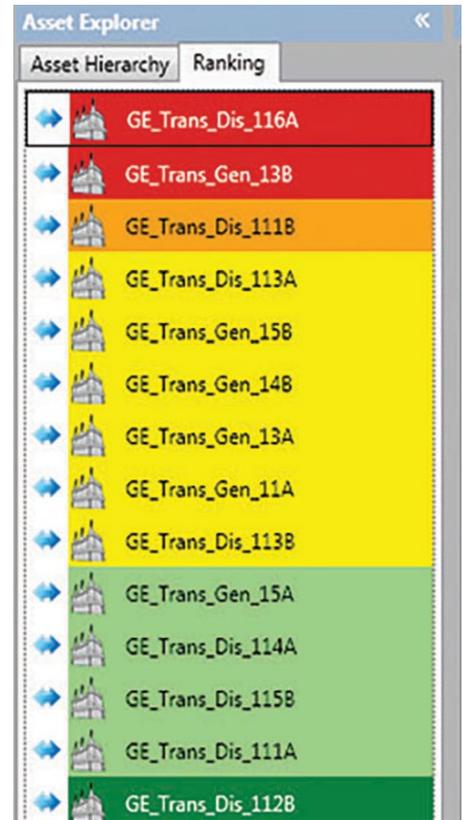

Why GE as your partner of choice?




Experience

- Stable, large multinational, here for the long term
- Significant R&D capability to continually innovate and solve any issue
- One-stop shop with largest portfolio of M&D products, software and services
- Focused on product reliability, offering some of the industry's longest warranty periods
- Dedicated regional sales, installation and service teams around the globe
- Largest DGA monitoring installed base: over 50,000 units sold world wide
- Well integrated with GE's Protection & Control and Industrial Communication products



Delivering Outcomes

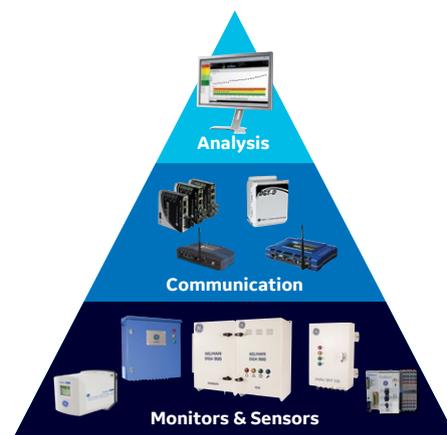


Support Services

- Installation and commissioning
- Technical support and product training
- Long term maintenance and service agreement
- Product rental solutions

Expert Services

- Cloud based remote monitoring
- Data diagnostics and interpretation
- Alarm setting and result analysis training

Technical Specifications

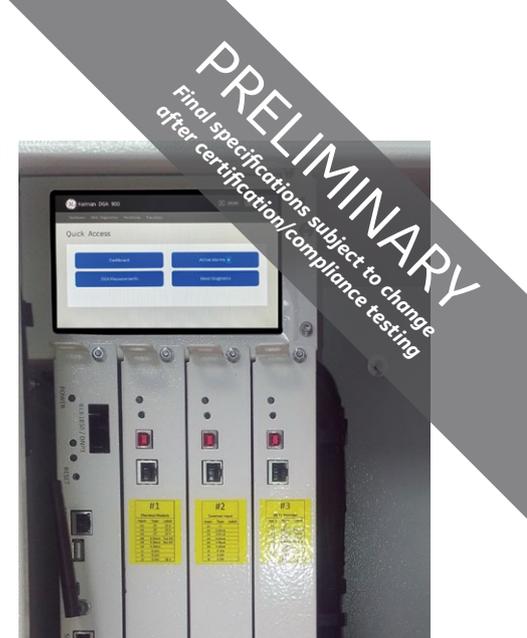

Location of maximum 3 x add-on cards

MEASUREMENTS	
Technology	Frequency
Automated head-space gas extraction.	Configurable from once per hour to once every 4 weeks.
Photo-acoustic spectroscopy (PAS) gas measurement.	Faster sampling automatically triggered upon alert level reached.
Thin film capacitive moisture sensor.	"Rapid Mode" provides a rapid indication of the evolution of the gasses indicated below in ~30 minutes.
Immersed fiber optic oxygen sensor.	

Range	LDL	UDL	Accuracy*	Repeatability	Response Time***	Rapid Mode
Hydrogen (H ₂)	5	5,000 ppm	± LDL or ±5%	< 3%	> 90%	•
Carb. Monox. (CO)	1	50,000 ppm	± LDL or ±3%	< 2%	> 95%	•
Methane (CH ₄)	2	50,000 ppm	± LDL or ±3%	< 2%	> 95%	•
Acetylene (C ₂ H ₂)	0.5	50,000 ppm	± LDL or ±3%	< 2%	> 95%	•
Ethylene (C ₂ H ₄)	1	50,000 ppm	± LDL or ±3%	< 2%	> 95%	•
Carb. Diox. (CO ₂)	20	50,000 ppm	± LDL or ±3%	< 3%	> 95%	•
Ethane (C ₂ H ₆)	1	50,000 ppm	± LDL or ±3%	< 2%	> 95%	•
Oxygen (O ₂)	100	50,000 ppm	± LDL or ±5%	< 2%		•
Nitrogen (N ₂)**	10,000	100,000 ppm	± LDL or ±15%			•
Moisture (H ₂ O)	0	100% RS (in ppm)	± 3% ppm	< 3%		•

*whichever is greater. Accuracy quoted is the accuracy of the detectors during calibration. Gas-in-oil measurement may be affected by oil type and condition. Repeatability as measured from final production test data.

** N₂ value is calculated and available on free-breathing transformers only.

*** Time Response (typical): % of value after 1 measurement cycle.

FEATURES

Display

4 x sunlight visible LED arrays
Integrated backlit 7" inch color resistive touch screen (800 x 480)
Embedded secure webserver (https)

Analogue Input

1 x standard split core load CT sensors

Digital Output

6 x standard customer programmable dry contact relays (type C, SPDT), NO/NC, 10A@ 250Vac resistive load, 10A@ 30Vdc resistive load

1 x standard service alarm relay

1 x standard watchdog relay

1Gb Ethernet (RJ45) standard with fiber-optic options

Digital Communications / Protocols

1 x Modbus® over RS485 / TCP/IP as standard

1 x Standard 1Gb Ethernet (RJ45)

Option: DNP3.0 over RS485 or TCP/IP

Option: IEC 61850 Edition 2

Option: ST/SC Multi-mode fiber converters

Option: GSM/GPRS/UMTS/HSPA+ modem

ADD-ON - Transformer Analytics

Pack 1 - Thermal Models

Standard: 3 x split core load CT sensors
Standard: 2 x magnetic mounted temperature sensor

Pack 2 - Cooling Monitoring

Standard: 4 x split core CT sensors
All sensors supplied as standard, no customization.

Note: Interdependency: Pack 2 requires Pack 1

ADD-ON - Others

Pack 3 - OLTC Monitoring

Standard: motor torque sensor
Standard: 2 x magnetic mounted temperature sensor
Standard: 4 - 20mA or Potentiometre OLTC position input (sensor not supplied)

Pack 4 - Bushing Monitoring 3 Phase Transformers

Up to 6 x bushing adaptors ordered separately
Up to 12 x bushings possible upon special request
Standard: neutral CT

All sensors supplied unless noted

OPTIONS

Select maximum 3 out of 4 add-on packs

Mounting stand

Sun canopy

Longer umbilical cable between units

ENVIRONMENT

Conditions

Operating ambient temperature -40°C to +55°C (-40°F to +131°F)

Operating ambient humidity 0-95% RH, non-condensing

Oil temperature at valve*** -20°C to +120°C (-4°F to +248°F)

***Based on testing carried out using Voltesso™ 35 mineral oil, over a 1/4" pipe run of 10 metres or less from oil supply or return valve to monitor connection point and on transformer oil supply valve volumes of 200 ml or less. For oil temperatures colder than -20 °C GE recommends the use of heat trace cabling on piping

Enclosure

IP56 certified

Standard: Powder coated marine grade 2mm aluminium (RAL9002)

Option: Unpainted 316 Stainless Steel

Power Requirements

AC Nominal 100-240 Vac, Range 85-264 Vac, 4A

DC Nominal 100-250 Vdc, Range 90-300 Vdc

Mechanical

	Analysis Unit	Hub Unit
Dimensions	600 x 484 x 330 mm	600 x 380 x 330 mm
	23.6 x 19.1 x 13.0 in	23.6 x 15.0 x 13.0 in
Weight	33.4 kg	18.5 kg
	73.6 lb	40.8 lb

Possible Combinations	Transformer		OLTC	Bushings	
	Pack 1	Pack 2	Pack 3	Pack 4	Pack 4
1	•				
2	•		•		
3	•			•	
4	•		•	•	
5	•	•	•		
6	•	•		•	
7			•		
8				•	
9			•	•	
10	•			•	•
11			•	•	•

Grid Solutions
Lissie Industrial Estate East
Unit 1, 7 Lissie Walk
Lisburn BT28 2LU
United Kingdom
Tel: +44 (0) 2892 622915

GEGridSolutions.com

All Rights Reserved. GE, the GE monogram, Kelman and Perception are trademarks of the General Electric Company.

Modbus is a registered trademark of Schneider Automation, Inc. IEC is a registered trademark of Commission Electrotechnique internationale. IEEE is a registered trademark of the Institute of Electrical and Electronics Engineers Inc. Voltesso is a registered trademark of Exxon Mobil Corporation

GE reserves the right to make changes to specifications of products described at any time without notice and without obligation to notify any person of such changes.

