




HIRSCHMANN

A **BELDEN** BRAND

Ruggedized Solutions



**When the going gets rough:
You are ready for everything with
the MACH1000 ruggedized solutions
from Hirschmann™.**




Strong not only in the power zone: The MACH1000 family.

The robust MACH1000 devices – proven as Substation switches – have been designed specifically for the requirements of the power generation and distribution sectors. However, their exceptional performance is not limited only to these – they perform exceptionally well under extreme ambient conditions and at high temperatures also in transport automation, in the military sector and in industrial automation.

The MACH1000 high-performance switches for Gigabit Ethernet applications are based on a comprehensive system with complete modularity, and integration into the OpenRail concept ensures maximum flexibility and variability. With their compact design in a 19" housing, a high port density of up to 28 ports and simple and

convenient ring configuration, these devices exhibit their strengths to the fullest extent in ruggedized applications. Here, the extended temperature range of -40°C up to $+85^{\circ}\text{C}$, the extreme EMI characteristics as well as the shock and vibration resistance represent additional benefits.

With the new MACH1000 variants, Hirschmann™ now also offers expansion from two to four Gigabit Ethernet ports and therefore new opportunities. Also new is the rugged M12 plug-in connector, which is intended specifically for use in harsh operating environments. Power over Ethernet and the MACH1000 variant with rear-facing, protected ports, which leave an uncluttered front panel are optional.

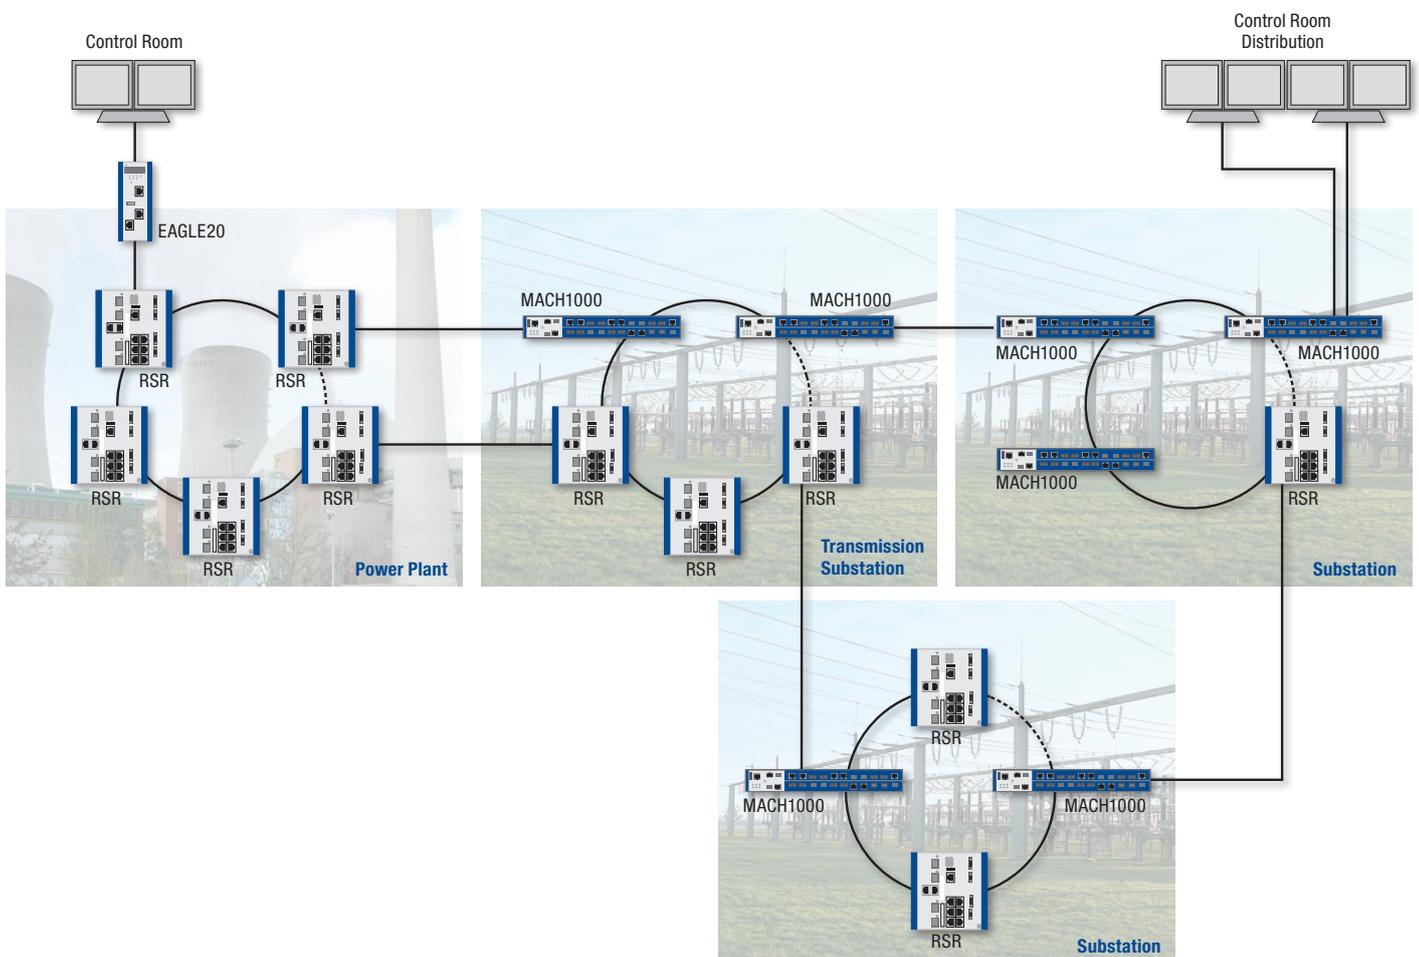



Modular ordering concept

- Multimode, Singlemode, Long-Haul, GE-SFP
- Freely selectable port assignment

Approvals

- IEEE 1613
- IEC 61850-3
- EN 50121-4

Ports

- Up to 28 ports
- Up to 4 Gigabit ports

Security

Port security (MAC and IP based), SNMP v3, authentication (802.1x), SSH

Redundancy functions

Fast HIPER-Ring, RSTP, redundant network/ring coupling, link aggregation



Diagnostic tools

LEDs, log file, syslog, port mirroring, cable diagnostics (TX), address conflict and network fault detection, SFP diagnostics (temperature, optical input and output performance)

Software

OpenRail Layer 2 Professional, a software platform with consistent functionality for all products

Ambient conditions

- Temperature -40°C up to +85°C
- Optional conformal coating
- Extreme EMI resistance



MACH1000 family Data and Facts

Product description	MAR1020-xx	MAR1030-xx
Description	Ethernet/Fast Ethernet switches Managed, Industrial switch for 19" cabinet, store and forward-switching,	Ethernet/Fast Ethernet/Gigabit Ethernet switches fanless design, Software Layer 2 Professional
Port type and quantity	Fast Ethernet ports in total: up to 24 24x FE modular order system, granularity 2	Gigabit Ethernet ports in total: up to 4; 2x Combo, or 4 TX, or 4 SFP Slots, or 2 TX / 2 SFP Slots Fast Ethernet ports in total: up to 24 24x FE modular order system, granularity 2
More Interfaces		
V.24 interface	1 x RJ11 socket	
USB interface	1 x to connect auto configuration adapter ACA 21-USB	
Gigabit Ethernet		
Twisted Pair (TP)	–	0–100 m
Multimode fiber (MM) 50/125 µm	–	0–550 m, 7.5 dB link budget (with M-SFP-SX/LC)
Multimode fiber (MM) 62.5/125 µm	–	0–275 m, 7.5 dB link budget (with M-SFP-SX/LC)
Single mode fiber (SM) 9/125 µm	–	0–20 km, 11 dB link budget (with M-SFP-LX/LC)
Single mode fiber (LH) 9/125 µm		16–80 km, 6–22 dB link budget (with M-SFP-LH/LC); 44–120 km, 13–32 dB link budget (with M-SFP-LH+/LC)
Fast Ethernet		
Twisted Pair (TP)	0–100 m	
Multimode fiber (MM) 50/125 µm	0–5000 m, 8 dB link budget	
Multimode fiber (MM) 62.5/125 µm	0–4000 m, 11 dB link budget	
Singlemode fiber (SM) 9/125 µm	0–32.5 km, 16 dB link budget	
Singlemode fiber (LH) 9/125 µm	24–87 km, 7–29 dB link budget	
Network size – cascading		
Line/star topology	Any	
Ring structure (Fast HIPER-Ring)	10/100/200 switches	
Fault recovery time	< 10 ms / < 40 ms / < 60 ms	
Power requirements		
Operating voltage	24/36/48 VDC (18–60V) or 120/250 VDC (77–320 V) and 110/230 VAC (90–265 V)	
Current consumption at 24 VDC	1250 mA max, if all ports are equipped with fiber	1400 mA max, if all ports are equipped with fiber
Current consumption at 230 VAC	140 mA (32 W) max, if all ports are equipped with fiber	150 mA (35 W) max, if all ports are equipped with fiber
Power output	max. 110 Btu (IT) h	max. 120 Btu (IT) h
Software		
Management	Serial interface, web interface, SNMP v1/v2, HiVision, file transfer via HTTP/TFTP	
Diagnostics	LEDs, log file, syslog, relay contact, RMON, port mirroring, topology discovery 802.1AB, cable tester (TX), address conflict detection, network error detection, SFP diagnostics (temperature, optical input and output power)	
Configuration	Command line interface (CLI), TELNET, BootP, DHCP, DHCP Option 82, HiDiscovery, auto configuration adapter (ACA 21-USB), integrated DHCP server, automatic invalid configuration undo	
Security	Port security multiple addresses (IP and MAC), SNMP v3, SSH, VLAN, authentication (802.1x)	
Redundancy functions	Fast HIPER-Ring, RSTP 802.1w, redundant network/ring coupling, link aggregation, redundant power supplies	
Filter	QoS 4 classes, port priority (IEEE 802.1D/p), VLAN (IEEE 802.1Q), multicast (IGMP snooping/querier), unknown multicast detection, broadcast/unicast/multicast limiter, fast aging, GMRP IEEE 802.1D, flow control 802.3x	
Realtime	SNTP Server, PTP/IEEE 1588	
Ambient conditions		
Operating/storage/transport temperature	–40°C up to +85°C, optional conformal coating	
Relative humidity	10% up to 95% (non-condensing)	
Mechanical construction		
Dimensions (W x H x D)	445 mm x 44 mm x 308 mm (345 mm)	
Weight	appr. 5 kg	
Protection class	IP30	
Mechanical stability		
IEC 60068-2-27 shock	15 g, 11 ms duration, 18 shocks	
IEC 60068-2-6 vibration	1 mm, (2–13.2 Hz), 90 min.; 0.7 g, (13.2–100 Hz), 90 min.; 3.5 mm, (3–9 Hz), 10 cycles, 1 octave/min.; 1 g, (9–150 Hz), 10 cycles, 1 octave/min.	
EMC interference immunity		
EN 61000-4-2 electrostatic discharge (ESD)	8 kV contact discharge, 15 kV air discharge	
EN 61000-4-3 electromagnetic field	35 Vpp/m (80–2700 MHz); 1 kHz, 80% AM	
EN 61000-4-4 fast transients (burst)	4 kV power line, 4 kV signal and data line	
EN 61000-4-5 surge voltage	Power line: 2 kV (line/earth), 1 kV (line/line)	
EN 61000-4-12 damped oscillatory wave	2.5 kV line/earth, 1 kV line/line (1MHz)	
EN 61000-4-16 mains frequency voltage	30 V; 50 Hz continuous; 300 V, 50 Hz 1 s	
Approvals		
Approvals	cUL 508 (pending), German Lloyd optional (pending), IEC 61850-3, IEEE 1613, NEMA TS2 (pending), EN 50121-4, EN 50155 (pending)	



Free configuration with the Hirschmann™ OpenRail system

MAR1030-CCMMMMMMVVZZTTTTTTTTTTTTTTTTFFFF99UGCHPHH04.0.

MAR1030-	Model
	MAR1020 Fast Ethernet
	MAR1030 Gigabit Ethernet
	MAR1022 FE with PoE
	MAR1032 GE with PoE
	MAR1120 FE ports on rear
	MAR1130 GE ports on rear
	MAR1122 FE PoE and ports on rear
	MAR1132 GE PoE and ports on rear

CC	Ports GE
	99 not present
	CC 2 ports Combo (10/100/1000BASE TX RJ45 plus related FE/GE-SFP Slot)
	40 4 ports SFP 1000 Mbps
	4T 4 ports 10/100/1000BASE TX RJ45
	OT 2 ports SFP 1000 Mbps + 2 ports 10/100/1000BASE TX RJ45

MM	1 + 2
MM	3 + 4
MM	5 + 6
VV	7 + 8
ZZ	9 + 10
TT	11 + 12
TT	13 + 14
TT	15 + 16
TT	17 + 18
TT	19 + 20
TT	21 + 22
FF	23 + 24
FF	25 + 26
99	27 + 28

FE Dual port type
1 + 2 · 3 + 4 · 5 + 6 · 7 + 8 · 9 + 10 · 11 + 12 · 13 + 14 · 15 + 16 · 17 + 18 · 19 + 20 · 21 + 22 · 23 + 24 · 25 + 26 · 27 + 28
99 not present
TT 2x Twisted Pair (Tx) 10/100 Mbps RJ45
MM 2x Multimode 100 Mbps SC
JJ 2x Multimode 100 Mbps MTRJ
NN 2x Multimode 100 Mbps ST
VV 2x Singlemode 100 Mbps SC
UU 2x Singlemode 100 Mbps ST
LL 2x Singlemode LH 100 Mbps SC
GG 2x Singlemode LH+ 100 Mbps SC
RR 2x SFP Slot 100 Mbps SFP
FF 2x Twisted Pair (Tx) 10/100 Mbps M12
FF 2x Multimode 10 Mbps ST

Temperature range
S 0° C up to +60° C
U -40° C up to +85° C
F -40° C up to +85° C, including conformal coating

U	Power supply 1
	C 24/36/48 VDC
	G 110/250 VDC / 110/230 VAC
	L 24/36/48 VDC connector
	M 110/250 VDC / 110/230 VAC connector

C	Power supply 2
	L 24/36/48 VDC connector
	M 110/250 VDC / 110/230 VAC connector

H	Approvals
	H cUL508 (pending), GL, IEC 61850-3, IEEE 1613

P	Software version
	P Professional: Enhanced software plus security, extended diagnostics and redundancy

H	Configuration
	H Standard
	X Customer specific

H	OEM-type
	H Standard
	X Customer specific

04.0.	Software release
	04.0. Software release 4.0

Compulsory field Optional

Enjoy the benefits of direct configuration with our online tool at configurator.hirschmann.com



HIRSCHMANN

A BELDEN BRAND

www.hirschmann.com

GLOBAL LOCATIONS

For worldwide Industrial Sales
and Technical Support, visit:
www.belden.com/Industrial



EUROPE

Headquarters – Germany
Hirschmann Automation and
Control GmbH
Phone: +49 7127 14-0
Fax: +49 7127 14-1542
INET-sales@hirschmann.de
web: www.hirschmann.com

Regarding the details in this brochure: The information/details in this publication merely contain general descriptions or performance factors which, when applied in an actual situation, do not always correspond with the described form, and may be amended by way of the further development of products. The desired performance factors shall only be deemed binding if these are expressly agreed on conclusion of the contract. Please note that some characteristics of the recommended accessory parts may differ from the appropriate product. This might limit the possible operating conditions for the entire system.